




# Wickets and gates – PILOFOR®

## Single-wing wicket – PILOFOR®

- surface finish: galvanized, galvanized + PVC (RAL 6005 - green), 2x topcoat
- frame made of square sections (closed)
- welded solid paneling with stamped “V” shape
- mesh size 50 × 200 mm
- wire diameter 5,00 mm
- wicket consists of 2 posts, including adjustable pivot hinges
- FAB lock, aluminum handle and plastic end stop of the wicket are part of the delivery
- **WICKET IS UNIVERSAL (left and right)**

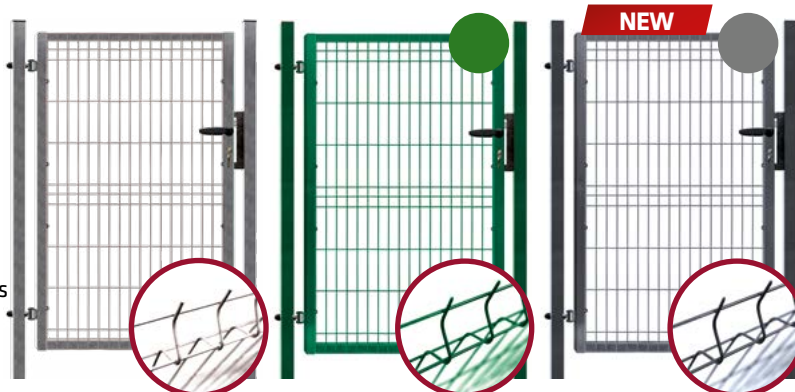


SINGLE-WING WICKET				
wicket width* × height (mm)	height of posts / section (mm)	Zn	galvanized + PVC RAL 6005	galvanized + PVC RAL 7016
1094 × 1045	1680 / 60 × 60	✓	✓	✓
1094 × 1245	1880 / 60 × 60	✓	✓	✓
1094 × 1545	2180 / 60 × 60	✓	✓	✓
1094 × 1745	2380 / 60 × 60	✓	✓	✓
1094 × 2045	2680 / 60 × 60	✓	✓	✓

\* width at post middle

MANUFACTURE OF GATES AND WICKETS  
**PILOFOR®**  
IN NON-STANDARD DIMENSIONS  
**MADE TO ORDER**


## FIVE-STAGE PROTECTION OF FRAME AND POSTS:

- 1 degreasing
- 2 phosphating
- 3 demineralized water rinse 3x
- 4 passivation (Envirox “SG” process)
- 5 polymer paint layer 80 µm



## Double-wing gate – PILOFOR®

- surface finish: galvanized, galvanized + PVC (RAL 6005 - green), 2x topcoat
- frame made of square sections (closed)
- welded solid paneling with stamped “V” shape
- mesh size 50 × 200 mm
- wire diameter 5,00 mm
- gate consists of 2 posts, including adjustable pivot hinges and central door latch with end stop
- FAB lock, aluminum handle and plastic end stop of the gate are part of the delivery
- **GATE IS UNIVERSAL**

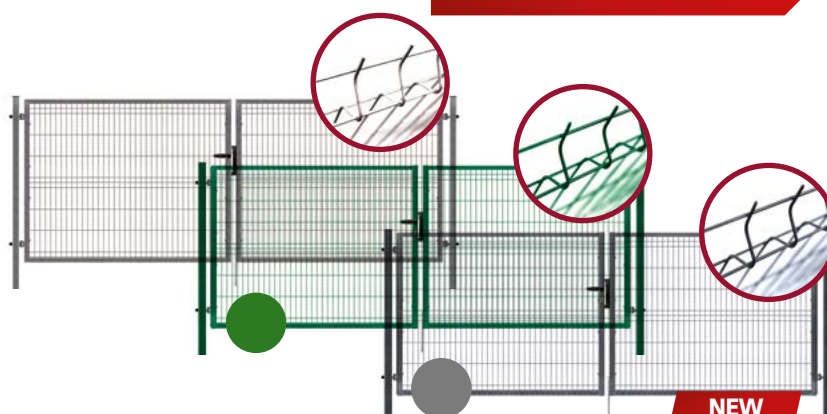

DOUBLE-WING GATE				
gate width* × height (mm)	height of posts / section (mm)	Zn	galvanized + PVC RAL 6005	galvanized + PVC RAL 7016
4118 × 1045	1680 / 80 × 80	✓	✓	✓
4118 × 1245	1880 / 80 × 80	✓	✓	✓
4118 × 1545	2180 / 80 × 80	✓	✓	✓
4118 × 1745	2380 / 80 × 80	✓	✓	✓
4118 × 2045	2680 / 80 × 80	✓	✓	✓

\* width at post middle


Visualisation – dual-wing gates  
bran 1045, 1245, 1545 mm.

Visualisation – dual-wing gates  
bran 1745 a 2045 mm.

## Single-wing wicket – PILOFOR®

### WICKET IS UNIVERSAL (left and right)

All accessories are compatible with dualsided panel installation to the wicket frame. Openings are universal.

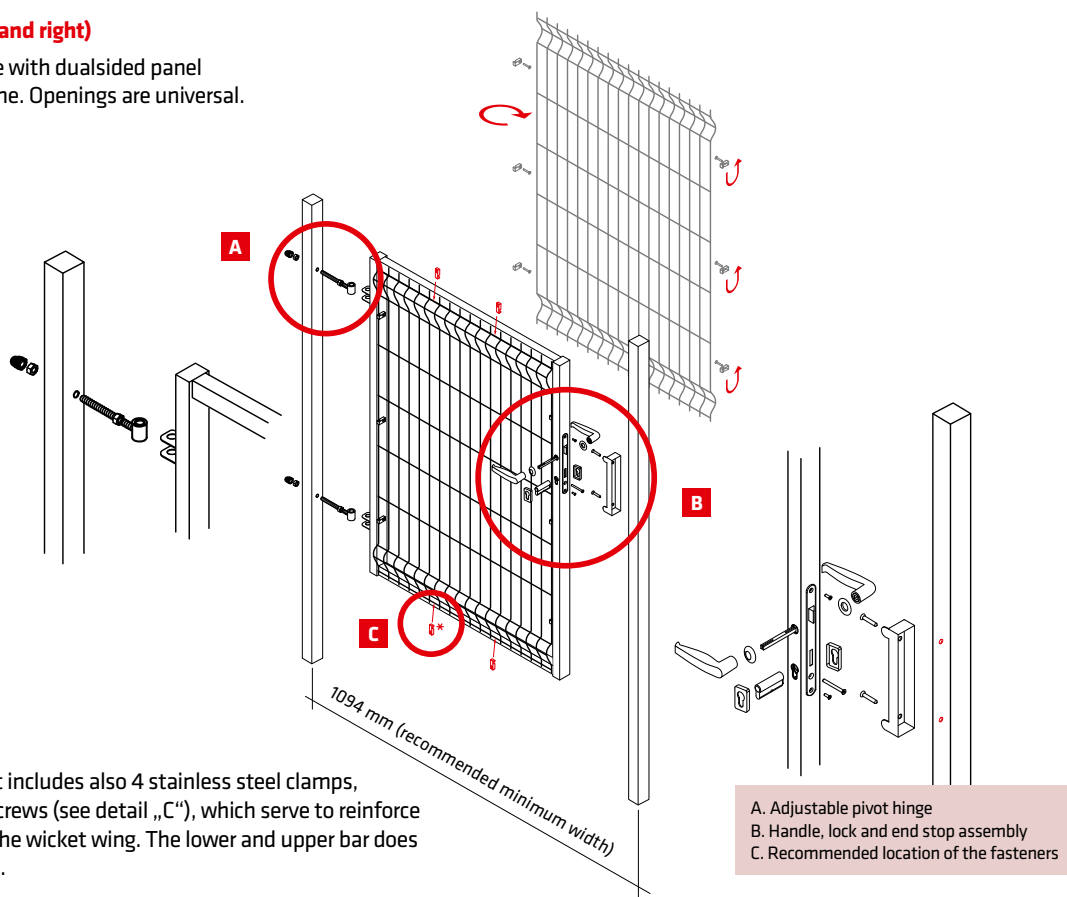


\* The accessory for the wicket includes also 4 stainless steel clamps, including the self-tapping screws (see detail „C“), which serve to reinforce the lower and upper bar of the wicket wing. The lower and upper bar does not have prepared openings.

## Double-wing gate – PILOFOR®

### GATE IS UNIVERSAL

All accessories are compatible with dualsided panel installation to the gate frame. Openings are universal.

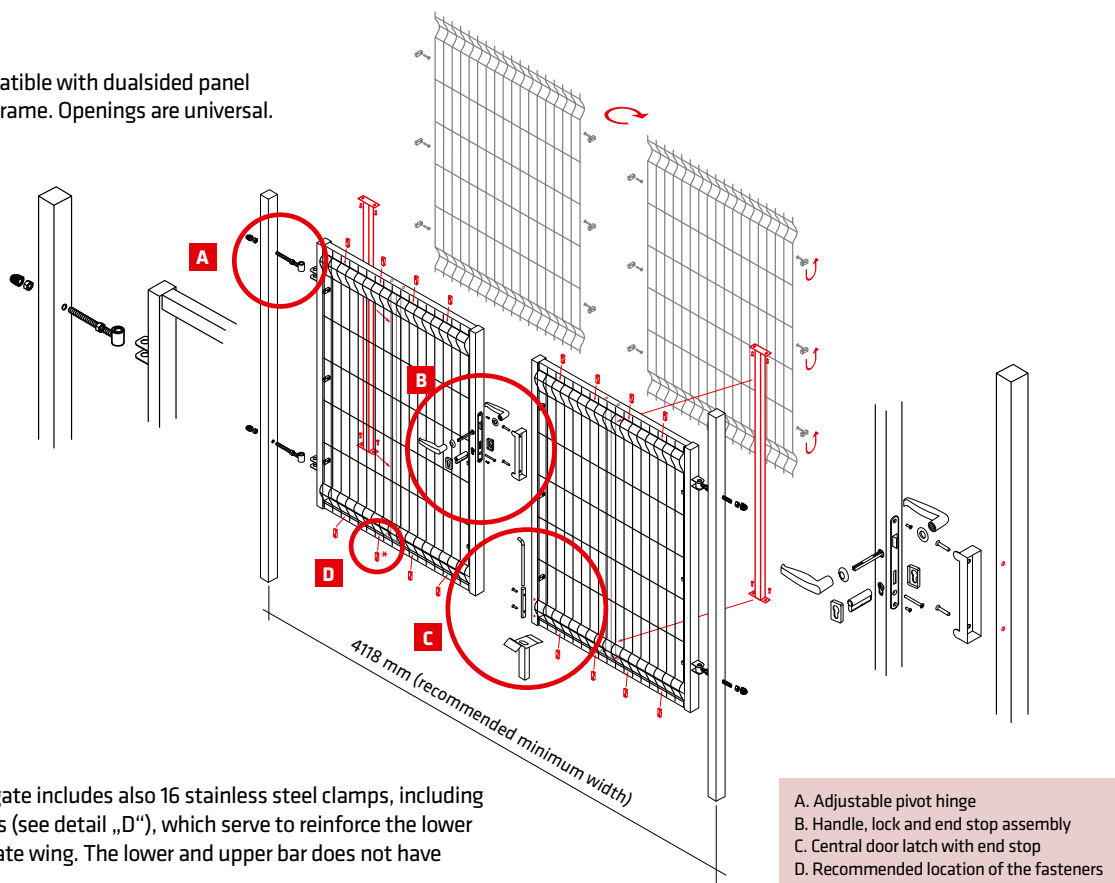

\* The accessory for the gate includes also 16 stainless steel clamps, including the self-tapping screws (see detail „D“), which serve to reinforce the lower and upper bar of the gate wing. The lower and upper bar does not have prepared openings.